


# Product Data



## FinCap® Screed Chair

<b>PRODUCT NUMBER</b>	08242FC100
<b>SIZE</b>	2.65" overall height
<b>APPLICATION</b>	Designed to support a 1.5"ID/1.9"OD galvanized screed pipe, schedule 40 or higher Can be used with 1.25" or 2" pipe Slab-on-grade, elevated slab, concrete overlay, vapor barrier slabs
<b>FEATURES</b>	<ul style="list-style-type: none"> <li>• Fits any mounting structure 0.375" to 0.625", 0.5" is ideal</li> <li>• "Fins" inside the chair hug the mounting structure so it won't bounce off the mounting structure during placement</li> <li>• 3.65" minimum slab thickness</li> <li>• FinCaps are designed to be stay-in-place forms</li> <li>• For use with hand or mechanical screeds</li> <li>• Use MAKO Driver to set FinCaps</li> <li>• Made of impact resistant, medical grade polypropylene</li> <li>• Will not corrode even in extreme environments</li> <li>• Iowa DOT approved, other states pending</li> <li>• 100% No Breakage Money Back Guarantee</li> <li>• Ideal for use on super flat floors to stay compliant with ACI 302.1R-04, ACI 117 and ASTM E 1155</li> </ul>
<b>SPACING</b>	Recommend placing a screed chair every 3-4' depending on length of screed pipe and sub-grade conditions
<b>LOAD</b>	Holds up to 1,000 lbs
<b>COVERAGE</b>	100 FinCaps per 3,000 sf      Packaged 100 FinCaps per bag
<b>MANUFACTURER</b>	Made in USA      MAKO Enterprises LLC, Des Moines, IA 50131

Finished Elevation of Slab

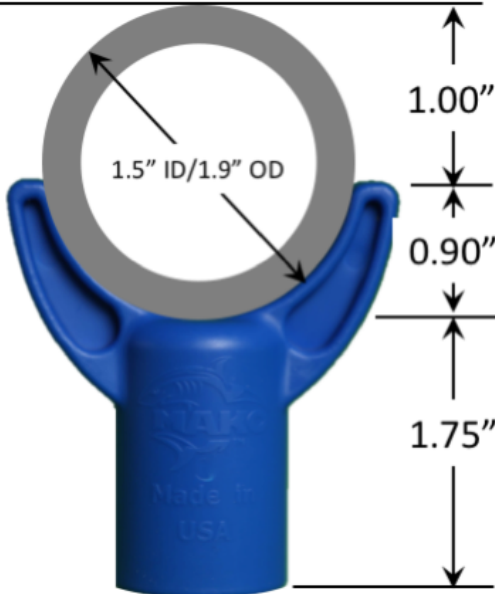

Accepts mounting structures 3/8" to 5/8" including #3, #4, #5 rebar



Patented: 8,096,182, 8,544,182 and Patent Pending