


Product Data



FinCap® Screed Chair

PRODUCT NUMBER	08242FC100
SIZE	2.65" overall height
APPLICATION	Designed to support a 1.5"ID/1.9"OD galvanized screed pipe, schedule 40 or higher Can be used with 1.25" or 2" pipe Slab-on-grade, elevated slab, concrete overlay, vapor barrier slabs
FEATURES	<ul style="list-style-type: none"> • Fits any mounting structure 0.375" to 0.625", 0.5" is ideal • "Fins" inside the chair hug the mounting structure so it won't bounce off the mounting structure during placement • 3.65" minimum slab thickness • FinCaps are designed to be stay-in-place forms • For use with hand or mechanical screeds • Use MAKO Driver to set FinCaps • Made of impact resistant, medical grade polypropylene • Will not corrode even in extreme environments • Iowa DOT approved, other states pending • 100% No Breakage Money Back Guarantee • Ideal for use on super flat floors to stay compliant with ACI 302.1R-04, ACI 117 and ASTM E 1155
SPACING	Recommend placing a screed chair every 3-4' depending on length of screed pipe and sub-grade conditions
LOAD	Holds up to 1,000 lbs
COVERAGE	100 FinCaps per 3,000 sf Packaged 100 FinCaps per bag
MANUFACTURER	Made in USA MAKO Enterprises LLC, Des Moines, IA 50131

Finished Elevation of Slab

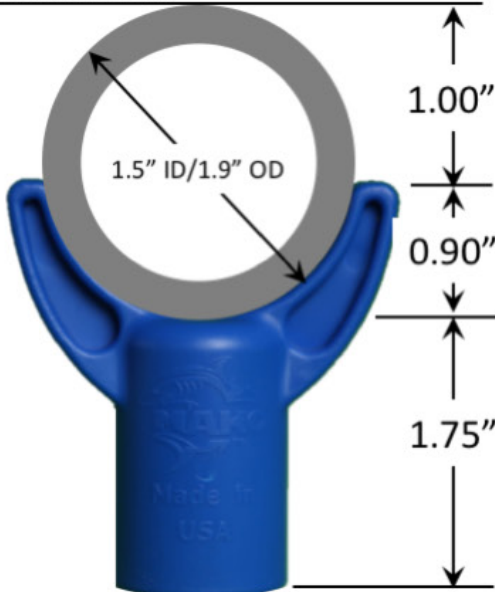

Accepts mounting structures 3/8" to 5/8" including #3, #4, #5 rebar



Patented: 8,096,182, 8,544,182 and Patent Pending